




MANUFACTURED UNDER U.S. PATENT NUMBER 4838303

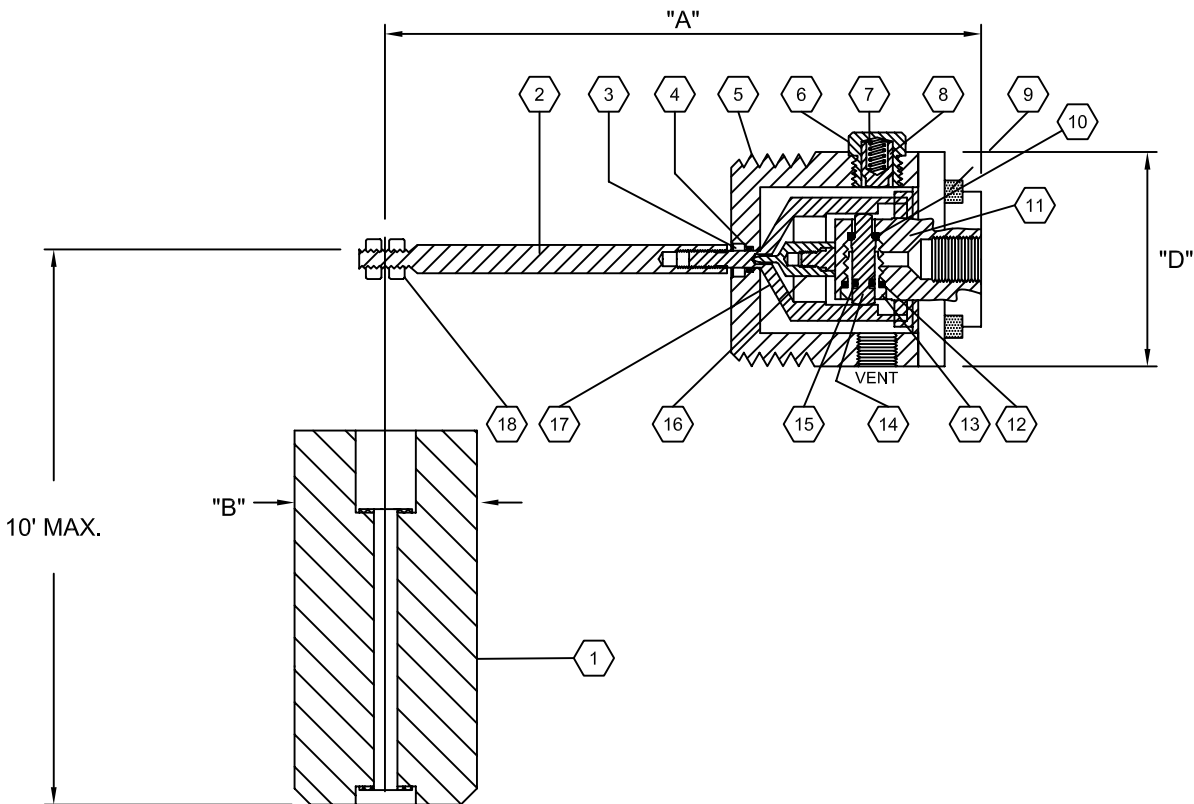

PARTS LIST

ITEM	QTY.	DESCRIPTION	MATERIAL	PART NO.
1	1	DISPLACER ASSEMBLY	POLYPROPYLENE & 18-8 ST. STL.	30-016-000
2	1	HANG DOWN FLOAT ROD	316 ST. STL.	30-033-000
3	1	BODY SEAL RETAINER	316 ST. STL.	30-007-0A0
4*	1	BODY SEAL	FLUOROCARBON	VO-008-75H
5	1	BODY	316 ST. STL.	30-001-0B0
6	1	SPRING CAP	316 ST. STL.	30-012-000
7	1	SPRING	INCONEL	30-014-000
8	1	SPRING GUIDE	316 ST. STL.	30-008-001
9	1	SOCKET HD. CAP SCREW	316 ST. STL.	TA-08K-0G3
10*	1	VALVE SEAT	FLUOROCARBON	V0-010-75H
11	1	CAST PIVOT VALVE BODY	316 ST. STL.	30-064-000
12*	1	VALVE RETAINER SEAL	FLUOROCARBON	VO-012-75H
13	1	VALVE RETAINER	316 ST. STL.	30-018-000
14	1	VALVE POPPET	316 ST. STL.	30-019-0B0
15*	1	POPPET SEAL	FLUOROSILICON	FO-006-70T
16	1	PIVOT	304 ST. STL.	30-079-000
17	1	CONE	17-4 PH ST. STL.	30-085-000
18	2	FLOAT ROD NUT	316 ST. STL.	T6-08K-073
19	-	REPAIR KIT	* ITEMS	30-089-000

SPECIFICATIONS

MAXIMUM TEST PRESSURE PSI (BAR) @ 100° F (37° C)	3240 (223)
MAXIMUM WORKING PRESSURE PSI (BAR) @ 100° F (37° C)	2160 (149)
AMBIENT TEMPERATURE RANGE	-20/+200° F -20/+93° C
MINIMUM SPECIFIC GRAVITY	0.6
MAX. PROCESS FLUID TEMPERATURE	200° F 93° C
MAXIMUM SUPPLY PRESSURE PSI (BAR)	50 (3.44)
Cv FACTOR	.16

DIMENSIONS IN. (MM)

A	4.50 (114.3)
B	2.00 (50.8)
C	4.10 (104.14)
D	2.37 (60.2)
PORTS	1/4" NPT
WEIGHT	3.3 LBS (1.5 KG)

FLEX-LEVEL

2-WAY LEVEL SWITCH
HANG DOWN

MODEL 30C2-P2(H OR L)33

WHILE THIS INFORMATION IS PRESENTED IN GOOD FAITH AND BELIEVED TO BE ACCURATE, RUELCO INC. DOES NOT GUARANTEE SATISFACTORY RESULTS FROM RELIANCE UPON SUCH INFORMATION. NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED, REGARDING THE PERFORMANCE, MERCHANTABILITY AND FITNESS WITH RESPECT TO THE PRODUCTS. RUELCO, INC. RESERVES THE RIGHT, WITHOUT NOTICE, TO ALTER OR IMPROVE THE DESIGNS OR SPECIFICATIONS OF THE PRODUCTS DESCRIBED HEREIN.